
GPS Tracker Manual



Preface

Thank you for purchasing the tracker. This manual shows how to operate the device smoothly and correctly. Make sure to read this manual carefully before using this product. Please note that specification and information are subject to changes without prior notice in this manual. Any change will be integrated in the latest release. The manufacturer assumes no responsibility for any errors or omissions in this document.

1. Summary

Working Based on existing GSM/GPRS network and GPS satellites, this product can locate and monitor any remote targets by SMS or internet. The most advanced technology of GPS and AGPS dual positioning. The waterproof level achieve IPX - 6.

2. Applications

- ⌘ Vehicle rental / Fleet management etc
- ⌘ Outdoor sports
- ⌘ Protect children / elder/ Asset/ pet and so on
- ⌘ Provide peace - of - mind for businessmen
- ⌘ Personnel Management
- ⌘ Criminals Tracking

3. Hardware Description



4.Specs.

Content	Specs.
Dim	105mm x 60mm x 20mm
Weight	144g
Network	GSM/GPRS
GSM Band	850/900/1800/1900Mhz
GSM chip	SIMTK6260
GPS chip	UBLOX
GPS sensitivity	- 159dBm
GPS accuracy	5m
Cold start	35 - 80s
Warm start	35s
Hot start	Hot status 1s
Car charger	Input: 12~24V , Output: 5V
Wall charger	Input: 110~220V ; Output: 5V
Battery	Li - ion battery :3.7V, 5000mAh
Standby	30 days
Storage Temp.	- 40°C to +85°C
Operation Temp.	- 20°C to +55°C
Humidity	5% - - 95% non - condensing

5.Usage:

5.1 SIM card installation

- 1).Open the cover, remove the screws by screwdriver,and insert GSM simcard:
- 2).Push back the cover and install the screws.



<1>



<2>



<3>

5.2 Battery and Charger

- First time to use: Keep in charged the battery over 12 hours Please use the battery and charger provided by the manufacturer.
- After first use, the battery usually should be charged fully between 3~5 hours.

Cautions:

- a:** For it's Li - ion battery, which contains harmful chemicals and may burst, please don't bump, puncture it violently and keep it off fire.
- b:** Please charge the battery in time to keep it working normally.

6.Startup

1).Power on gps unit:

Insert the SIM card

Turn on the unit outdoors by pressing the Power on button until the indicator is on.

In 10~40 seconds, the unit will begin to work and acquire the GSM signals as well as the GPS signal. 2).Indicators status:

Green LED: GPRS working status

Status	Meaning
flashing	GSM / GPRS signal fine
On	No GSM signal
off	GPS power off/In sleep

Blue LED: GPS working status

Status	Meaning
flashing	GPS signal Fine
on	No GPS signal
off	GPS power off/In sleep

Red LED for power charging status

Status of indicator	Meaning
Red led on	Charging
red led flash	Low battery
red led off	Full battery or charged full

3)SMS meanings:

1.Google link: URL

2.V:A GPS signal ok. **V:V** :No GPS signal

3.2014 - 04 - 18 02:17:15:GPS Time

4.S:000km/h: Speed of tracker

5.Bat:6:Battery Level (Range :1 ~9)

6.ID:4102000759: ID Number of GPS



7.Operations (Default password: 123456)

7.1.Change password

SMS format: pwd+old password,new password

Example: pwd123456,666888

it will reply sms: “password OK”

(Note:password should be 6 digits Arabic numbers)

7.2 Set admin phone number:

1).Add admin number:

SMS format: adm123456,0086138*****

Note1:The other admin numbers should be set by the first authorized number. If the number is successfully authorized, the unit will reply “admin ok!” in SMS.

Note2:Note:country code should be added in front of phone number)

2).Delete admin number:

SMS format: adm123456,

Example: adm123456,

Reply sms: ADM! A1:

7.3.Track on demand:

SMS format:G123456#

1).GPS Set with admin numbers: when admin numbers dials up the unit, tracker device will reply by sms,It wont reply to other numbers

2).GPS without admin numbers: Any cellphone dial up the GPS simcard,tracker device will reply by sms locations information ,as below:



7.3.Track by GSM Location(Only for admin phone, default:closed)

Command to open :addjz=1

Command to close :addjz=0

8.0.Commands List:


Feature name	Active Command	Reply	Cancel other format) Command	Reply
Add admin number	adm123456,0086138**** **** (country code is needed in front of phone number)	ADM ! A1:138*****	adm123456,	ADM! A1:
Change password	pwd123456,666888	password OK		
Inquiry Location	G123456#	Google map link		
Overspeed	speed123456 80 (50~120 km/h)	speed ok (80km/h)	nospeed123456	nospeed ok
Move alarm	move123456 500 (100~5000m)	move ok	nomove123456	nomove ok
Shock alarm	shock123456	shock ok	noshock123456	Noshock ok
Sleep in time mode	Sleep123456 time (Default model:LK109,106)	Sleep time ok	If not did any operation,Tracker will be in sleep mode in 5 minutes,and it will be woke up by any calling ,sms or pressing buttons.	
Shock sleep mode	sleep123456 shock (Default model:LK208)	sleep shock ok	sleep123456 off	sleep off ok
Restart Device	RST	GPS will restart	factory	All the settings will be restored to be factory settings
Add sos number	SOS,0086138*****, 0086139*****	SOS ! S1 : 138*****, S2: 139*****	sos, ,	SOS! S1: , S2:
Open GSM locate	addjz=1	Open GSM locate function	addjz=0	Close GSM locate function
Set Ip and port	adminip123456 60.191.150.102 7700	adminip ok		
Set APN	Format1: apn,cmnet,user,password	APN OK	Format2:apn,cmnet	APN OK
GPRS interval time	upload123456 30 (10~300 seconds)	Time ok	upload123456 300	Time ok
Time Zone	time zone123456 2	Time ok	time zone123456 - 3	Time ok
Language	LAG1	Switched to English	LAG2	Switched to Chinese

.Login by Tracking Website and Phone APP

6.1 Login by Website:

A, Open the website: gps.tk-star.com

B, Login by username or the IMEI/ID, the default password “123456” and Click “GO

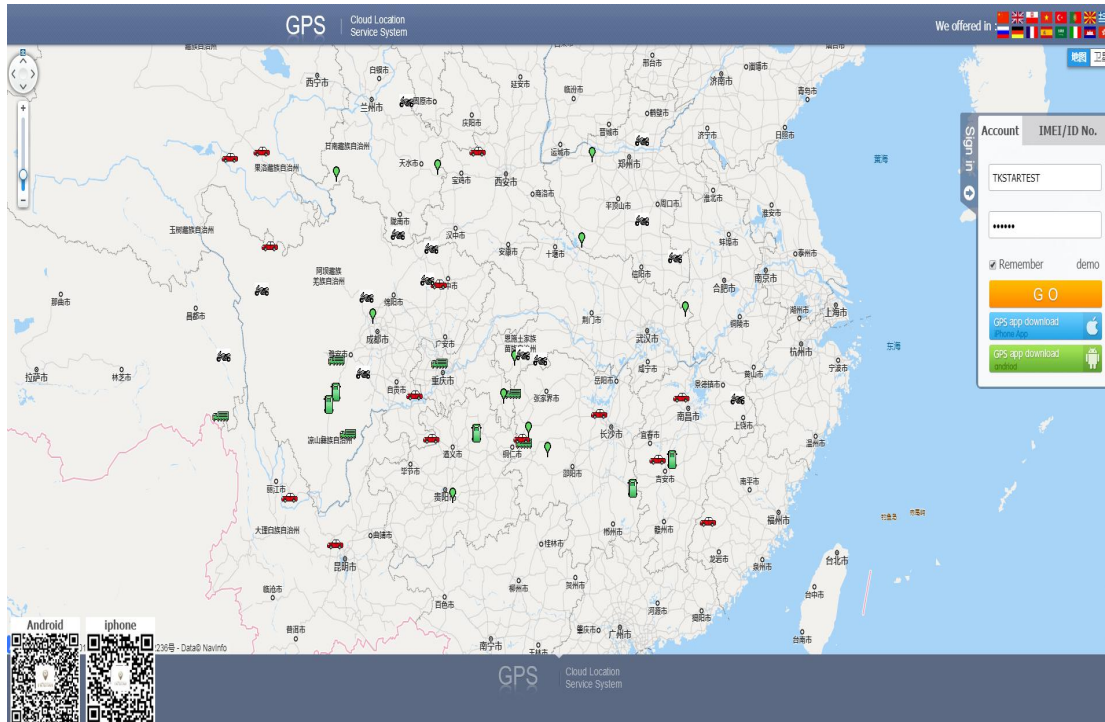

A, Download Phone APP:

Method 1: Scan below QR to download;



Method 2: search “TKSTAR GO” in the APP store or Google play store to download.



Select "Log in by IMEI" on the bottom of screen

Server: gps.tk-star.com

IMEI/ID : on the back side of device

Password: 123456

9.0 Cautions

9.1 Keep the unit dry. Any liquid, i.e. rain, moisture, may destroy or damage the inside circuitry.

9.2 Don't use & store the unit in dusty places.

9.3 Don't put the unit in overheated or overcooled places.

9.4 Handle carefully. Don't vibrate or shake it violently.

9.5 Clear the unit with a piece of dry cloth. Don't clean in chemicals, detergent.

9.6 Don't paint the unit, this may cause some foreign materials left in between the parts.